


1 2 3 4 5 6 7 8 9 10




A

A

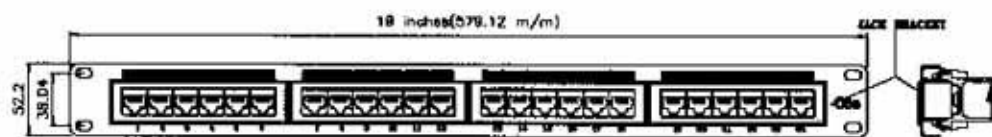

B

B

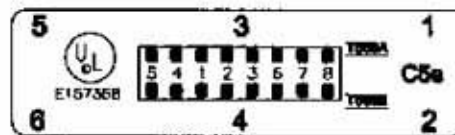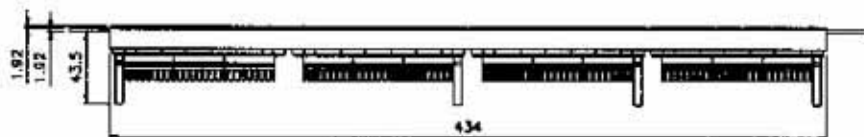

C



C

T568A WIRING

- PIN 5 WHITE/BLUE
- PIN 4 BLUE
- PIN 1 WHITE/GREEN
- PIN 2 GREEN
- PIN 3 WHITE/ORANGE
- PIN 6 ORANGE
- PIN 7 WHITE/BROWN
- PIN 8 BROWN

T568B WIRING

- PIN 5 WHITE/BLUE
- PIN 4 BLUE
- PIN 1 WHITE/ORANGE
- PIN 2 ORANGE
- PIN 3 WHITE/GREEN
- PIN 6 GREEN
- PIN 7 WHITE/BROWN
- PIN 8 BROWN



D

D


Cat.5e Patch Panel, Top Entry type.

SPECIFICATION

1. Panel material: 1.6 mm thickness Metal, Black color painting.
2. RJ45 Jack: BPBC Top Entry type, PBT UL 94V-0 rated, Black color.
3. Connector: New Version 110D connectors, PC UL 94V-2, White color. Can be used for both type of KRONE & 110 Impact tool.
4. P.C.board: FR4 P.C.B. 1.6 mm thickness, double side.
5. Jack Bracket Set: UL94V-0 ABS, Black color.
6. Screws: Round head, #3 x 20 mm, Silver color.

E

E

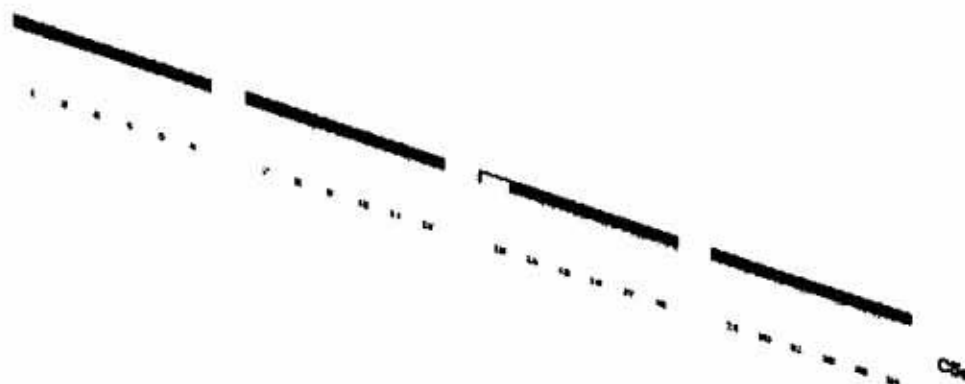

F

F

G

G

TITLE: CAT5e PATCH PANEL			
DRAW NO.: 37584.1		APPROVED:	
SCALE: NONE		ORDER NO.:	
REV: 1-0	TOLERANCE: ±0.20		
UNIT: mm			